

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R4W

LINE	BEARING	DISTANCE
L1	N 03°46'50" W	30.49'
L2	N 00°19'08" E	31.76'
L3	S 03°17'53" E	17.23'

SEC 2
1/4
SEC 11

U.S.B.&M.


V-19



NORTH

1"=30'

COUNTY ROAD

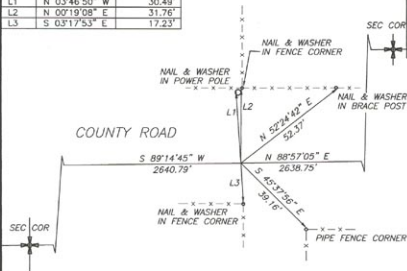


NOTE: "SWING TIE" BEARINGS SHOWN FOR RELATIVE PURPOSES ONLY. NOT RELATIVE TO SECTION LINES.

DESCRIPTION OF CORNER EVIDENCE FOUND

USED TIES FROM PREVIOUS SURVEYS TO DETERMINE THE LOCATION OF 1/4 CORNER.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 5/8"x24" REBAR WITH 2 1/2" ALUMINUM COUNTY MONUMENT, STAMPED:



REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 17 Dec '03

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor



SEND 18 DEC 03